


A

A

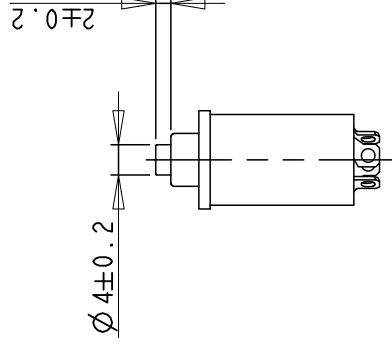

B

B

POUSOIR NOIR  $\varnothing 4$

BLACK BUTTON  $\varnothing 4$

ENDURANCE MECANIQUE : 100000 CYCLES

MECHANICAL STRENGTH : 100000 CYCLES

ETANCHEITE FACE AVANT SUIVANT :

WATERPROOF FRONT FACE IN CONFORMITY

MIL STD 810 D-506.2 METHODE 2

WITH : MIL STD 810 D-506.2 METHODE 2

AUTRES CARACTERISTIQUES, IDENTIQUE A :

OTHER CHARACTERISTICS IDENTICAL TO :

83-450-702 FT83-450-702E

C

C

-
-
<b>83450724</b>
Product:

**A** CREATION DE L'OBJET

Modified by	R-BISSLER	07/10/2002
Verified by	R-JUNILLON	07/10/2002
Authorized by	NON APPLIC.	



2, rue du Dr. ABEL  
BP 59, 26902,  
Valence CEDEX 9  
France

Customer:  
Designation/FR: **BOUTON POUSSOR ETANCHE EFFET TACTILE INVERSEUR UNIPOLAIRE**  
Designation/GB: **WATERPROOF PUSH-BUTTON TACTILE-EFFECT SINGLE POLE CHANGE OVER**

Toler. gene. lin  $\pm$  mm  
Toler. gene. Ang  $\pm$  degres

General Raw surface  
Ra  $\checkmark$

mm  
degres

This document is the property of Crouzet-Automatismes.  
It's contents cannot be reproduced or divulged without the company's written approval.  
The product data and specifications found on this document do not constitute any contractual obligation.  
Crouzet-Automatismes and its subsidiaries reserve the right to modify the specifications.  
All rights of reproduction, modification, reprinting, and translation reserved for all countries



Scale  
**1/1**

Department: CT

Design by R-BISSLER 07/10/2002  
Verif. by R-JUNILLON 07/10/2002  
Authorized by NON APPLIC.

Customer Ref.:  
PFT001:0<C>;0<M>

NATO code: FA0X2

Dispatching **01**

Index **A**

Folio **1/1**

Format **A4**

**FT83450724FR**

D

D